


# DS-2CE16D0T-IT1/IT3/IT5

HD1080P EXIR Bullet Camera

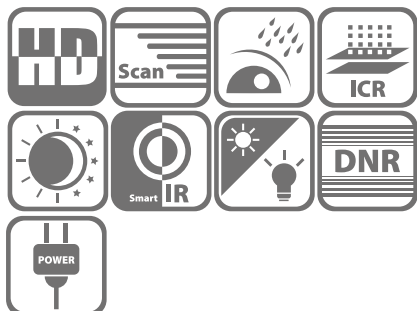


## Key features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night, Smart IR
- EXIR technology, up to 40m IR distance
- IP66 weatherproof

## Available Models

DS-2CE16D0T-IT1, DS-2CE16D0T-IT3,  
DS-2CE16D0T-IT5

## Dimension

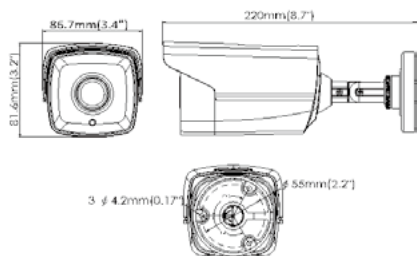

## Accessories



DS-1280ZJ-XS  
Junction box



DS-1H18 Video  
Balun



X41T Camera  
Tester

	DS-2CE16D0T-IT1	DS-2CE16D0T-IT3	DS-2CE16D0T-IT5
<b>Camera</b>			
Image Sensor	2MP CMOS Image Sensor		
Signal System	PAL/NTSC		
Effective Pixels	1920(H)*1080(V)		
Min. illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR		
Shutter Time	1/25(1/30)s to 1/50,000s		
Lens	2.8mm, 3.6mm, 6mm optional	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)	3.6mm (6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 103°(2.8mm), 82.2°(3.6mm), 54°(6mm)	Angle of View: 103°(2.8mm), 82.2°(3.6mm), 54°(6mm), 37.7°(8mm), 24.2°(3.6mm), 18.8°(6mm)	Angle of View: 82.2°(3.6mm), 54°(6mm), 37.7°(8mm), 24.2°(3.6mm), 18.8°(6mm)
Lens Mount	M12		
Day & Night	ICR		
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 180°, Rotation: 0 - 360°		
Synchronization	Internal synchronization		
Video Frame Rate	1080p@25fps/1080p@30fps		
HD Video Output	1 Analog HD output		
S/N Ratio	>62dB		
<b>General</b>			
Operating Conditions	-40 °C - 60 °C (-40 °F - 140 °F), Humidity 90% or less (non-condensing)		
Power Supply	12 VDC±15%		
Power Consumption	Max. 4W	Max. 4W	Max. 6W
Protection Level	IP66		
IR Range	Up to 20m	Up to 40m	Up to 80m
Dimensions	86.22×82.05×220.13mm(3.39"×3.23"×8.67")		
Weight	430 g (0.95 lb)		